




Also Available: 252LKLFLoose Key





No-Kink Hose Bibs

0

E.

Features & Benefits

- Heavy duty lead-free brass construction
- Certified to NSF/ANSI 372
- Inlet connections: 1/2" (inside diameter) and 3/4" (outside diameter copper sweat
- Utilizes Arrowhead's exclusice no-leak one-piece bonnet with EPDM O-ring seal
- Maximum pressure: 125 PSI
- Maximum temperature: 140°F

- Flow rate: 8-9 GPM at 50 PSI
- 3-year limited warranty
- Also available in:

•


- loose-key lock-shield (#252LKLF)
- factory-installed anti-siphon vacuum breaker (**#252BFPLF**)






Materials & Dimensions

Component	Material
Valve Body	Lead-Free Brass*
Stem	Lead-Free Brass*
Bonnet	Lead-Free Brass*
O-ring	EPDM
Seat Washer	SBR
Seat Screw	Stainless Steel
Bonnet Washer	Nylon
Handle	Aluminum
Handle Screw	Stainless Steel

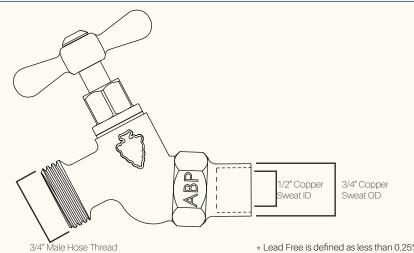

* Lead Free is defined as less than 0.25% lead content, certified by IAPMO to NSF/ANSI 372

Repair & Replacement Parts

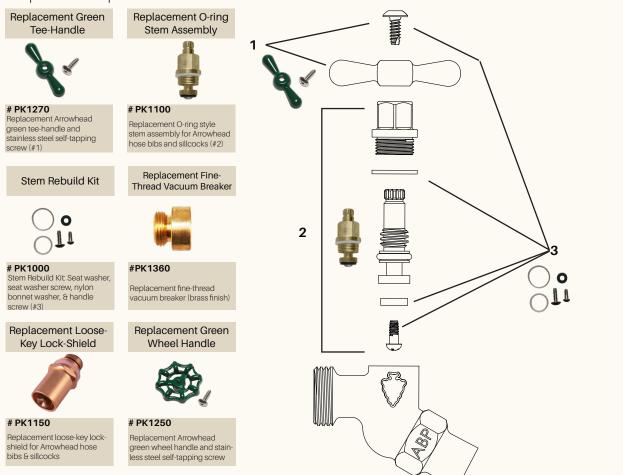

UPC C LEAD FREE

Arrowhead Brass & Plumbing, LLC 5147 Alhambra Ave., Los Angeles, CA 90032 Tel: (323) 221-9137 | Fax: (323) 221-2579 | Email: customer.service@arrowheadbrass.com | Website: www.arrowheadbrass.com © Copyright: 2022 Arrowhead Brass & Plumbing, LLC. WARNING: This product can expose you to chemicals including lead, which is known to the State of California to cause, cancer and reproducive harm. For more information, go to www. P65Warnings.ca.gov