255XLF - 355XLF Extra-Large Flange Sillcocks






Extra-Large Flange Sillcocks

Features & Benefits

- · Heavy-duty lead-free brass construction
- NSF/ANSI 372 certified by IAPMO
- Utilizes Arrowhead's exclusive no-leak one-piece bonnet with EPDM O-ring seal
- Oversized integrated 3-1/4" brass flange designed for extra wall coverage
- 2-3/4" wide enclosed screw holes to securely fasten to the mounting wall
- Maximum pressure: 125 PSI
- Maximum temperature: 140° F
- Flow rate: 9 GPM at 50 PSI
- 3-year limited warranty
- · Available in:
- 1/2" FIP thread x 3/4" MHT XL flange (225XLF)
- 3/4" FIP thread x 3/4" MHT XL flange (355XLF)






Materials & Dimensions


Component	Material
Valve Body	Lead-Free Brass
Stem	Lead-Free Brass
Bonnet	Lead-Free Brass
O-ring	EPDM
Seat Washer	SBR
Seat Screw	Stainless Steel
Bonnet Washer	Nylon
Handle	Aluminum
Handle Screw	Stainless Steel


^{*} Lead Free is defined as less than 0.25% lead content, certified by IAPMO to NSF/ANSI 372

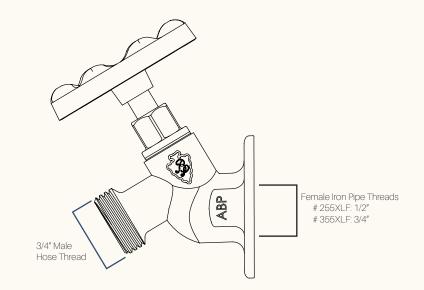

Repair & Replacement Parts



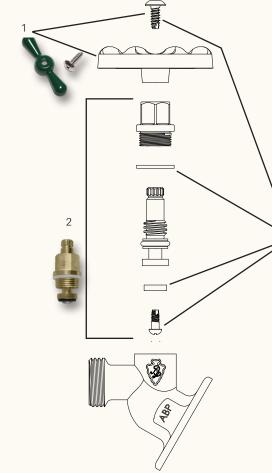



#PK1150



Replacement green wheel & stainless steel self-tapping screw

#PK1250



WARNING: This product can expose you to chemicals including lead, which is known to the State of California to cause, cancer and reproducive harm. For more information, go to www. P65Warnings.ca.gov