




SS Series Straight Supply Stops

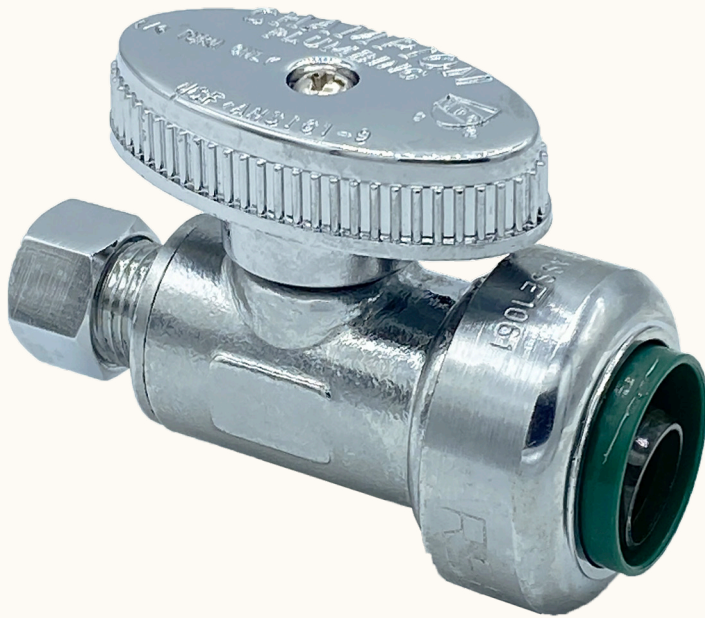

Push-Fitting




Copper Sweat

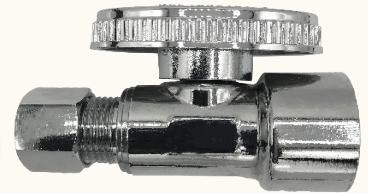


FIP Thread



PEX



Compression



CPVC

Straight Supply Stops

Features & Benefits

- Forged lead-free brass body
- Chrome-plated
- NSF/ANSI 61 certified by IAPMO
- QuickTurn® 1/4 ball-valve operation
- Connection types include: push-fit, crimp-style PEX (ASTM F1807), copper sweat, compression, female iron pipe thread, cold expansion PEX (ASTM F1960), and CPVC (glue on)
- **3-year limited warranty**

- Available in:
- 1/2" crimp PEX x 1/4" OD compression (**SS50X25C**)
- 3/4" crimp PEX x 3/8" OD compression (**SS50X37C**)
- 1/2" push-fitting x 1/4" OD compression (**SS50R25C**)
- 1/2" push-fitting x 3/8" OD compression (**SS50R37C**)
- 1/2" copper sweat x 3/8" OD compression (**SS50S37C**)
- 5/8" OD compression x 3/8" OD compression (**SS50C37C**)
- 1/2" FIP x 3/8" OD compression (**SS50F37C**)
- 1/2" CPVC x 3/8" OD compression (**SS50P37C**)





Materials & Dimensions

Component	Material
Valve Body	Lead-Free DZR Brass, Chrome Plated
Seal	PTFE
Ball	Lead-Free DZR Brass, Chrome Plated
O-Ring	EPDM
Stem	Lead-Free DZR Brass, Chrome Plated
Handle	ABS
Lock Nut	Stainless Steel SS304
Bonnet	Lead-Free DZR Brass, Chrome Plated
Ferrule	Brass, Chrome Plated
Nut	Brass, Chrome Plated

Model	Length (in)	Width (in)	Height (in)	Weight (lbs)
SS50F37C	2.25	1	1.5	0.2
SS50C37C	2.34	1	1.5	0.21
SS50S37C	2.15	1	1.385	0.17
SS50R25C	2.425	1.125	1.575	0.22
SS50R37C	2.55	1.125	1.575	0.22
SS50X25C	2.135	1	1.375	0.15
SS50X37C	2.265	1	1.375	0.15
SS50P37C	3.1	1	1.5	0.25

* Lead Free is defined as less than 0.25% lead content, certified by IAPMO to NSF/ANSI 372



WARNING: This product can expose you to chemicals including lead, which is known to the State of California to cause, cancer and reproductive harm. For more information, go to www.P65Warnings.ca.gov