




Lead Free Ball Valve Hose Bibs

Arrowhead Brass ball valve hose bibs are made of lead-free brass and are available in a variety of connection types. The “BVLF” series features unobstructed high flow rates that can only be achieved with the ball valve design. Arrowhead Brass ball valve hose bibs are available in no-kink models or sillcock models, which feature a solid-flange with enclosed screw holes.

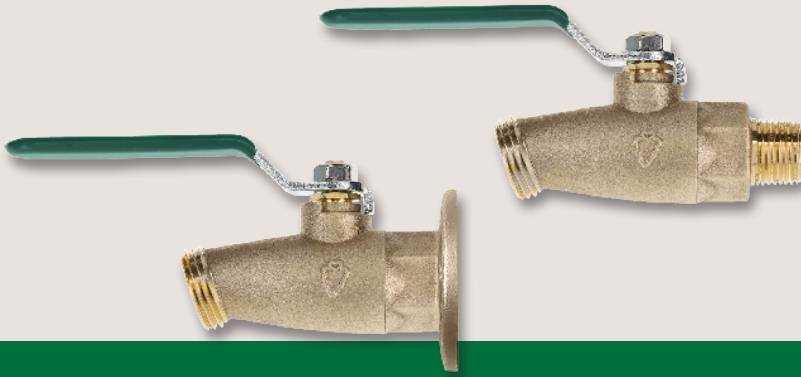

Models

251BVLF	No-kink ball valve hose bib 1/2" MIP x 3/4" MHT
252BVLF	No-kink ball valve hose bib 1/2" copper sweat x 3/4" MHT
253BVLF	No-kink ball valve hose bib 1/2" FIP x 3/4" MHT
351BVLF	No-kink ball valve hose bib 3/4" MIP x 3/4" MHT
353BVLF	No-kink ball valve hose bib 3/4" FIP x 3/4" MHT
255BVLF	Ball valve solid-flange sillcock 1/2" FIP x 3/4" MHT
355BVLF	Ball valve solid-flange sillcock 3/4" FIP x 3/4" MHT

Features and Specifications

- Heavy duty lead-free brass construction. NSF/ANSI 372 certified by IAPMO.
- Bi-directional QuickTurn operation.
- Chrome plated brass ball and PTFE seals.
- Full flow design with 10-12 GPM flow rates at 50 PSI.
- ADA compliant.
- Maximum pressure: 125 PSI.
- Maximum temperature: 180° F
- 3-year limited warranty.
- Imported, made in China.

Model	Length (in)	Width (in)	Height (in)	Weight (lbs)
251BVLF	5.25	1.25	2.25	0.7
252BVLF	5.25	1.25	2.25	0.7
253BVLF	5.25	1.25	2.25	0.62
351BVLF	5.25	1.25	2.25	0.73
353BVLF	5.25	1.25	2.25	0.066
255BVLF	5.25	1.25	2.25	0.78
355BVLF	5.25	1.25	2.25	0.076

