


NKM Series No-Kink Hose Bibs



Also Available:
NK50M-LK & NK75M-LK
Loose Key



NK50M-QT & NK75M-QT
QuickTurn

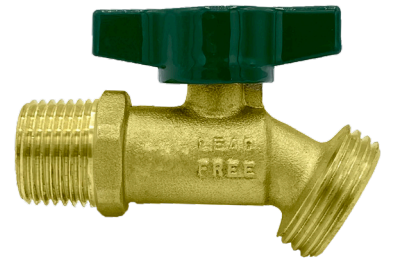

No-Kink Hose Bibs

Features & Benefits

- Forged heavy construction lead-free brass
- Certified to NSF/ANSI 372 by IAPMO
- Inlet connections: 1/2" & 3/4" Male Iron Pipe (FIP)
- Multi-purpose external shut-off valves for use in low pressure water systems
- Maximum pressure: 125 PSI
- Maximum temperature: 140°F
- Imported, made in China
- 3-year limited warranty
- Available in:
 - MIP 1/2" (**NK50M**) & 3/4" (**NK75M**)
 - loose-key lock-shield (**NK50M-LK & NK75M-LK**)
 - QuickTurn (**NK50M-QT & NK75M-QT**)



Materials & Dimensions

Component	Material
Valve Body	Lead-Free Brass*
Stem	Lead-Free Brass*
Bonnet	Lead-Free Brass*
O-ring	EPDM
Seat Washer	SBR
Seat Screw	Stainless Steel
Bonnet Washer	Nylon
Handle	Aluminum
Handle Screw	Stainless Steel

Model	Length (in)	Width (in)	Height (in)	Weight (lbs)
NK50M	2.25	1	3	0.33
NK75M	2.25	1	3	0.36
NK50M-QT	3	1	1.875	0.24
NK75M-QT	3	1	1.875	0.28
NK50M-LK	2.25	1	3	0.35
NK75M-LK	2.25	1	3	0.4



WARNING: This product can expose you to chemicals including lead, which is known to the State of California to cause, cancer and reproductive harm. For more information, go to www.P65Warnings.ca.gov