


# RGA Series Push-Fit Threaded Adapters

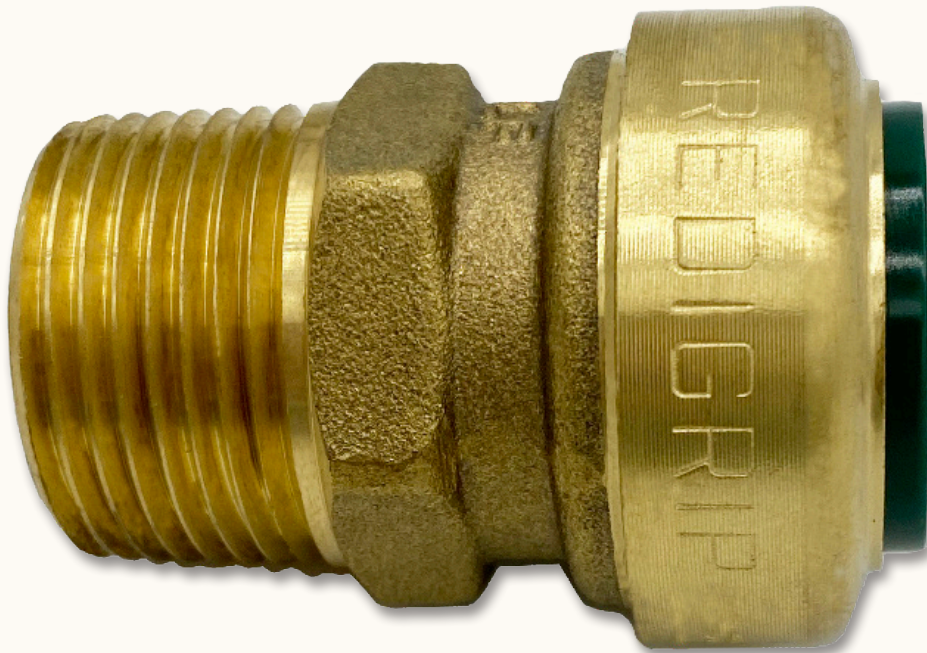

## Push-Fit Threaded Adapters

### Features & Benefits

- Forged lead-free brass body
- IAPMO certified and listed to NSF/ANSI 61 and ANSI 1061
- For use in potable water and hydronic heating water distribution
- Easily connect to copper tube, CTS CPVC, or PEX within seconds
- Fast and efficient to improve performance and save time
- Includes PEX stiffener for use with PEX tubing
- Approved for underground and behind-the-wall installations without access panels
- No soldering or sealants needed
- Maximum pressure: 200 PSI
- Maximum temperature: 200° F
- **3-year limited warranty**

- Available in:
- 1/2" push-fitting x 1/2" FPT (**RGA50F50**)
- 1/2" push-fitting x 3/4" FPT (**RGA50F75**)
- 1/2" push-fitting x 1/2" MPT (**RGA50M**)
- 1/2" push-fitting x 3/4" MPT (**RGA50M75**)
- 3/4" push-fitting x 3/4" FPT (**RGA75F75**)
- 3/4" push-fitting x 3/4" MPT (**RGA75M75**)
- 1" push-fitting x 1" FPT (**RGA100F100**)
- 1" push-fitting x 1" MPT (**RGA100M100**)



- 1" push-fitting x 3/4" MPT (**RGA100M75**)
- 1/2" push-fitting x 1/2" FPT, elbow (**RGEA50F50**)
- 1/2" push-fitting x 1/2" MPT, elbow (**RGEA50M50**)



## Materials & Dimensions

Component	Material
Body	Lead Free DZR Brass
O-rings	EPDM (ASTM D2000)
Grip Rings	Stainless Steel (ASTM A240)
Protector	POM (ASTM D6100)
Release Collar	POM (ASTM D6100)
PEX Stiffener	PSF (ASTM D6394)

\* Lead Free is defined as less than 0.25% lead content, certified by IAPMO to NSF/ANSI 372



**WARNING:** This product can expose you to chemicals including lead, which is known to the State of California to cause, cancer and reproductive harm. For more information, go to [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov)