

254CCLF Series No-Kink Hose Bibs



Also Available:

254CCLKLF

Loose Key



254CCBFPLF

Factory installed
Vacuum Breaker



No-Kink Hose Bibs


Features & Benefits

- Heavy duty lead-free brass construction
- Certified to NSF/ANSI 372
- Inlet connections: 1/2" copper compression
- Utilizes Arrowhead's exclusive no-leak one-piece bonnet with EPDM O-ring seal
- Maximum pressure: 125 PSI
- Maximum temperature: 140°F
- Flow rate: 8-9 GPM at 50 PSI
- 3-year limited warranty
- Also available in:
 - loose-key lock-shield (**#254CCLKLF**)
 - factory-installed anti-siphon vacuum breaker (**#254CCBFPLF**)





Materials & Dimensions

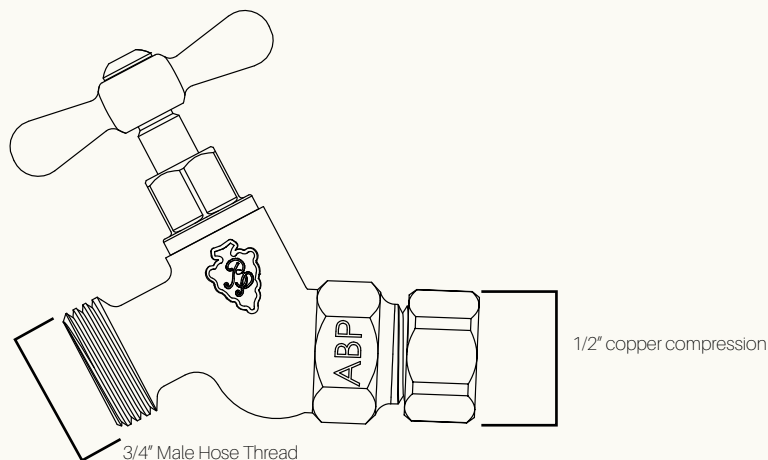
Component	Material
Valve Body	Lead-Free Brass*
Stem	Lead-Free Brass*
Bonnet	Lead-Free Brass*
O-ring	EPDM
Seat Washer	SBR
Seat Screw	Stainless Steel
Bonnet Washer	Nylon
Handle	Aluminum
Handle Screw	Stainless Steel



* Lead Free is defined as less than 0.25% lead content, certified by IAPMO to NSF/ANSI 372

Repair & Replacement Parts

<p>Replacement Green Tee-Handle</p>  <p># PK1270 Replacement Arrowhead green tee-handle and stainless steel self-tapping screw (#1)</p>	<p>Replacement O-ring Stem Assembly</p>  <p># PK1100 Replacement O-ring style stem assembly for Arrowhead hose bibs and sillcocks (#2)</p>
<p>Stem Rebuild Kit</p>  <p># PK1000 Stem Rebuild Kit: Seat washer, seat washer screw, nylon bonnet washer, & handle screw (#3)</p>	<p>Replacement Fine-Thread Vacuum Breaker</p>  <p>#PK1360 Replacement fine-thread vacuum breaker (brass finish)</p>
<p>Replacement Loose-Key Lock-Shield</p>  <p># PK1150 Replacement loose-key lock-shield for Arrowhead hose bibs & sillcocks</p>	<p>Replacement Compression nut & Ferrule</p>  <p># PK1180 Replacement brass compression nut & ferrule</p>

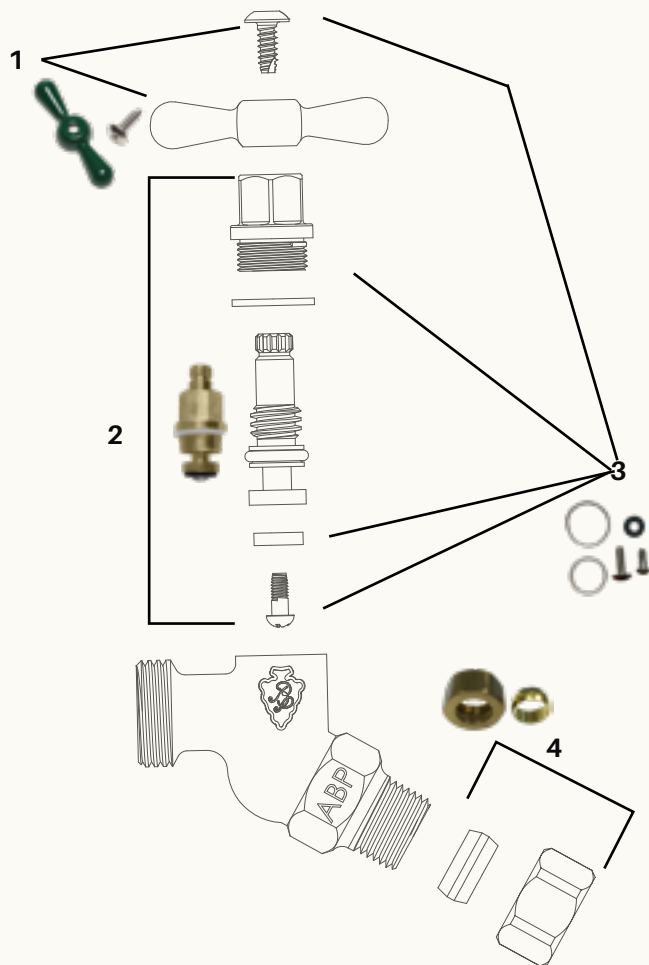

WARNING: This product can expose you to chemicals including lead, which is known to the State of California to cause, cancer and reproductive harm. For more information, go to www.P65Warnings.ca.gov