


420LF Series Anti-Siphon Frost-Proof Wall Hydrants

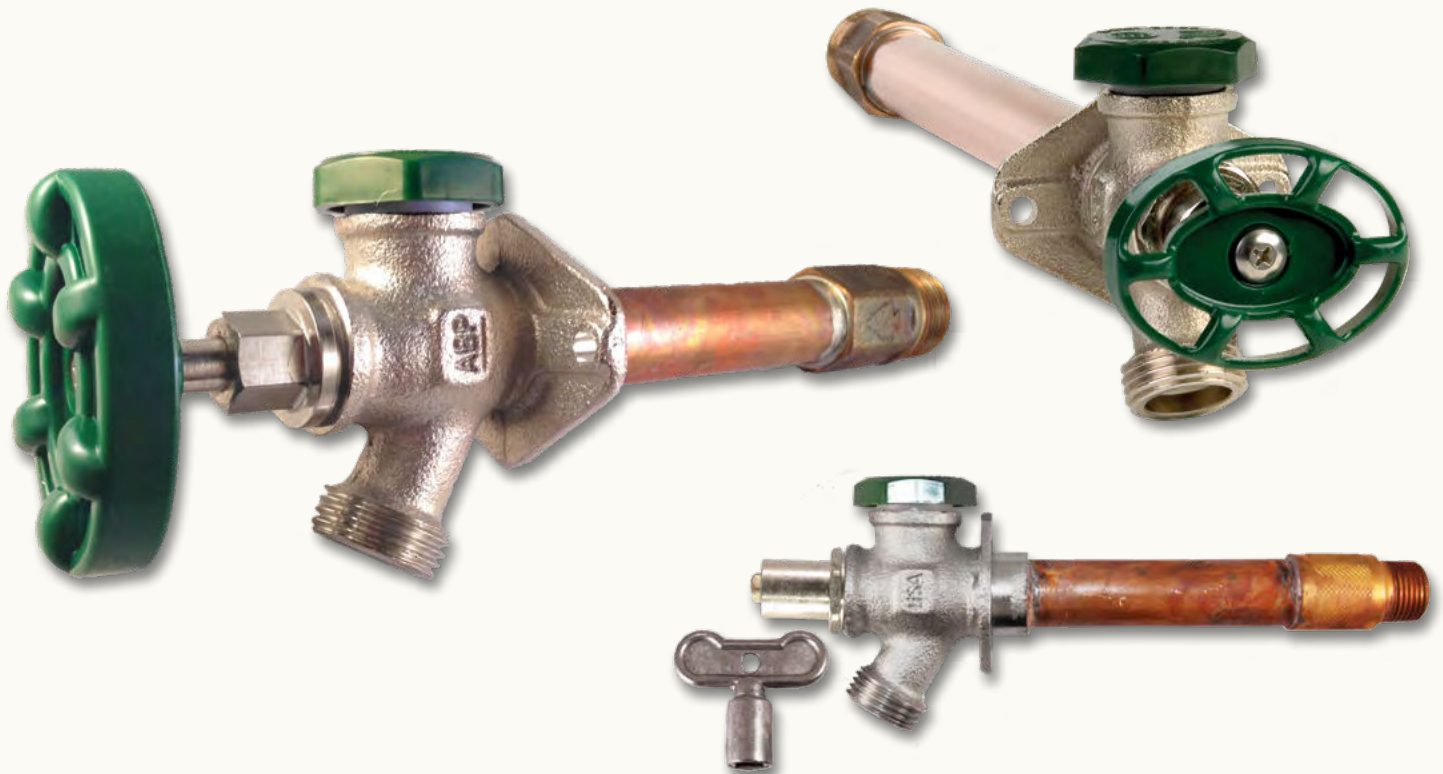

Lead Free Wall Hydrants With Integral Anti-Siphon Vacuum Breaker

Features & Benefits

- Heavy duty lead free bronze construction
- NSF/ANSI 372 certified lead free by IAPMO
- Integral anti-siphon back-flow prevention; ASSE 1019-A approved, IAPMO certified
- QuickTurn® style operation: easy on-off operation without letting go of the handle
- Exclusive O-ring bonnet & stem design with rubber-coated oval handle
- Maximum pressure: 125 PSI
- Maximum temperature: 1800 F
- 3-year limited warranty
- Available in 2, 4, 6, 8, 10, 12 & 14 inch lengths
- Available in loose-key models
- **Per ASSE 1019 plumbing code, this product is not intended to be under constant pressure (turned on) for over 12 hours at a time. Use of Y-Splitters or hose-bib sprinkler timers is not suggested.**






420LF Series Anti-Siphon Frost-Proof Wall Hydrants

Base Model & Options

422 Series- 1/2" Uponor PEX A Inlet	425 Series- 1/2" FIP 3/4" MIP Inlets	426 Series- 1/2" MIP & Sweat Inlets	428 Series- 3/4" MIP & Sweat Inlets	429 Series- 1/2" PEX Inlet	Loose Key Option
					
# 422-xxQTLF 3/4" MIP & copper sweat inlet x 3/4" hose thread outlet	# 425-xxQTLF 1/2" WIRSBO style tube inlet x 3/4" hose thread outlet	# 426-xxQTLF 1/2" FIP & 3/4" MIP inlets x 3/4" hose thread outlet	# 428-xxQTLF 1/2" MIP & copper sweat inlet x 3/4" hose thread outlet	# 429-xxQTLF 1/2" PEX style tube inlet x 3/4" hose thread outlet	# 42_-xxLKLf Removable loose key lock- shield

Repair & Replacement Parts

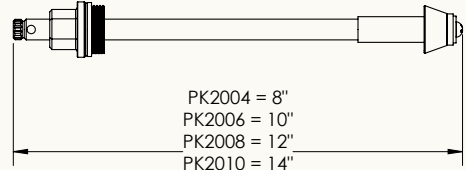Air-Vent Assembly Parts	Replacement Oval Handle & Screw	Complete Stem Assembly	Spring-less Check Assembly	
				
# PK1430 Includes green cap (# 4), housing (# 3), plunger (# 1), & O-ring (# 2)	# PK1295 Replacement rubber-coated green oval handle (# 6) & stainless steel screw (# 5)	# PK20xx * 04, 06, 08, 10, 12, 14 - inch stem assembly (# 7-10)	# PK2016 Replacement spring-less check assembly (# 10)	PK2004 = 8" PK2006 = 10" PK2008 = 12" PK2010 = 14" PK2012 = 16" PK2014 = 18" *For 420 series hydrants installed prior to 1999, use PK20__SP stem assembly to replace old style stems that have a spring check assembly. Contact Arrowhead Brass for more details

