

460LF Series Arrow-Breaker® Frost-Proof Wall Hydrants



Arrow-Breaker® Lead-Free Wall Hydrants with built-in anti-siphon technology

Features & Benefits

- Heavy duty lead-free bronze construction
- Certified to NSF/ANSI 372 ; UPC listed
- The Arrow-Breaker® built-in anti-siphon technology protects your household water supply from harmful contaminants and eliminates the need for an external add-on vacuum breaker.
- QuickTurn® style operation: easy on-off operation without letting go of the handle
- Wall flange with built-in offset to allow water drainage upon shut-off
- Maximum pressure: 125 PSI
- Maximum temperature: 140° F
- 3-year limited warranty
- Available in 2, 4, 6, 8, 10, 12 & 14 inch lengths
- Available in loose-key and QuickTurn® models
- **Per ASSE 1019 plumbing code, this product is not intended to be under constant pressure (turned on) for over 12 hours at a time. Use of Y-Splitters or hose-bib sprinkler timers is not suggested.**





460LF Series Arrow-Breaker®
Frost-Proof Wall Hydrants

Base Model & Options

462 Series- 1/2" Uponor PEX A Inlet	465 Series- 1/2" FIP 3/4" MIP Inlets	466 Series- 1/2" MIP & Sweat Inlets	468 Series- 3/4" MIP & Sweat Inlets	469 Series- 1/2" PEX Inlet	Loose Key Option
					
# 462-xxQTLF	# 465-xxQTLF	# 466-xxQTLF	# 468-xxQTLF	# 469-xxQTLF	# 46-xxLKLF
1/2" Uponor - PEX A Inlet	1/2" FPT ID 3/4" MPT OD Inlet	1/2" Copper Sweat ID 1/2" MPT OD Inlet	3/4" Copper Sweat ID 3/4" MPT OD Inlet	1/2" Crimp PEX (ASTM F1807) Inlet	Removable loose key lock-shield

Repair & Replacement Parts

Spring-less Check Assembly



PK6026


Replacement Arrow-Breaker® check assembly (# 1)

Replacement Oval Handle & Screw



PK1295

Replacement rubber-coated green oval handle & stainless steel screw (# 2)

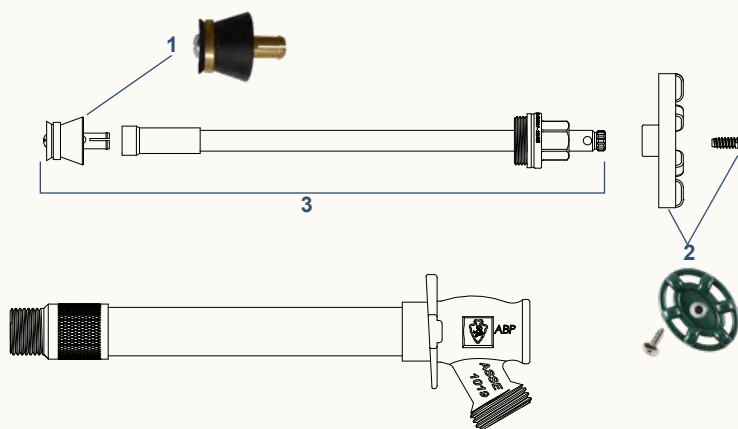


Complete Stem Assembly



PK60xx *

04, 06, 08, 10, 12, 14 - inch stem assembly (See below)



PK6004 = 8"

PK6006 = 10"

PK6008 = 12"

PK6010 = 14"

PK6012 = 16"

PK6014 = 18"

WARNING: Frost-Proof wall hydrants must be installed with a downward tilt toward the hose thread outlet AND the hose or other devices must be removed in cold and freezing weather.

Failure to properly winterize a frost-proof wall hydrant can result in damage caused by freezing water and is not covered under warranty. For more information please visit our website at www.arrowheadbrass.com



WARNING: This product can expose you to chemicals including lead, which is known to the State of California to cause, cancer and reproductive harm. For more information, go to www.P65Warnings.ca.gov